

Water Temp II

Gives constant temperature readings while water flows. Has on/off control of hot/cold water supply. Fits 99% of faucets, swivels 360° degrees. Has water strainer in fitting. Large 3" dual scale thermometer, adjustable needle, probe contact of thermometer built-in. Ready to be inserted into plumbing. 5 year warranty.




ECP445 Delta Water Temp II

65010

Flo-Temp Thermometer Well

Attaches to faucet (or with adapter). Built-in filter. Holds Premier/Samigon/Weston type dial thermometers. Guarantees temperature control at the faucet. Operator adjusts temperature at water source. Angled for easy reading. Nylon with brass fittings.

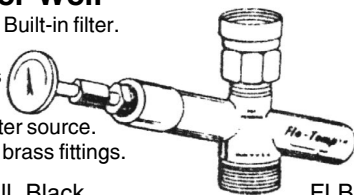

EPF901 Thermometer Well, Black

FLB

Aqualizer

Magnetic water conditioner & lime fighter. In line for 70% more strength. Two in-Line Force Fields. Stops algae. No maintenance. As cold water passes through the intense magnetic field created by the Aqualizer the characteristics of the water are changed so that the algae and lime will no longer be a problem. 3/4" MPT.



ECP656D Water Conditioner/Lime Fighter

79010

Flowmeter I

Conserves water. Rated 150 PSI. Stainless steel float and guide rod. Extremely accurate ± 2%. Extra high pressure, space age flowmeter with Buna N, O Rings. Accurately measures .5 to 5 GPM of water. Saves water, pays for itself. 1/2" MPT.



ECP437D Flowmeter I

78110

Vacuum Breaker I

Meets plumbing codes and EPA compliance regs. Prevents backflow. Anti-siphon 1/2" IPC. Chrome.



ECP434D Vacuum Breaker I

78210

Hose Bibb Vacuum Breaker II

Screw on spout. Anti-siphon prevents reverse flow of contaminated water back to portable water supply. Required by most U.S. City plumbing Codes and EPA Compliance Regs. Fire, freezing, natural disasters, accidents, and broken or cracked pipes below level of vacuum breaker can siphon chemicals, solvents, etc. into water system. GHT fittings on both ends.



ECP435D Hose Bibb Vacuum Breaker II


78230

Water Temperature Control Panels

All models are fully assembled, plumbed, and lab tested. Controls are 1/2" FPT. 3" dial thermometer with calibration screw. Some units include a vacuum breaker which prevents backflow and stop check valves which provide one-way flow of water. Models 15 and 25 have 3/4" GHT for water outlets. Models 800 and 1000 have 1/2" FPT for water outlets.

Model 15: Manual Water Panel

- Economical temperature control
- Hot & cold water ball valves
- Flow control ball valve
- 1/2" NPT inlet connections, 3/4" GHT outlet
- 20 micron water filter cartridge



ECP468D Manual, model 15

65115

Model 25

- Thermostatic mixing valve for accurate temperature control
- Flow control ball valve
- 1/2" NPT inlet connections, 3/4" GHT outlet
- Adjustable spring check valves
- 20 micron water filter cartridge




ECP470D Model 25

65125

Model 800

- Hot & cold water filtration
- Vacuum breaker
- .5 - 5 GPM flowmeter
- Adjustable spring check valves
- Two- 20 micron water filter cartridges

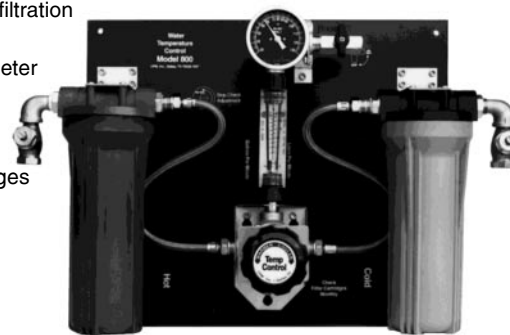

ECP466D Model 800 water control, Regular Flow

66800

ECP472D Model 800 water control, Low Flow

65150

PERSONAL SERVICE IS OUR #1 PRIORITY



East: 111 Asia Place, Carlstadt, NJ 07072

(201) 939-7722

FAX: (201) 939-7782

West: 2710 McCone Ave., Hayward, CA 94545

(510) 293-0575

FAX: (510) 293-0565